


microFIDELITY[™] Digital Stereo Audio Amplifier



Model 200



- 150 Watts maximum output power
- Operates as stereo amplifier or mono block (switchable)
- 115 dB signal-to-noise ratio: suitable for high-end audio
- Ultra small at 3-9/16 " (W) x 3-7/16 " (D) x 3/4 " (H)



The Model 200 amplifier is an **ultra-small digital audio amplifier** designed for high-fidelity home-audio, studio-monitor and home-theater applications. Being only the **size of a deck of cards**, the Model 200 amplifier delivers **150 Watts of power** and thereby offers an unprecedented power-to-size ratio. Due to its small size and water-resistant construction, the amplifier can be placed virtually anywhere.

The amplifier can be switched to drive either two speakers at a maximum power of 40 Watts per speaker or a single speaker as a monoblock amplifier at up to 150 Watts. The amplifier achieves a **115 dB signal-to-noise ratio**, a **total harmonic distortion of only 0.04 %** and a **frequency response of 1 Hz to 70 kHz**.


At a **high power efficiency** and an idle power consumption of less than 2 Watts, the amplifier does not need ventilation and is environmentally friendly.

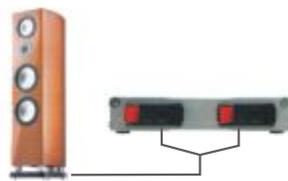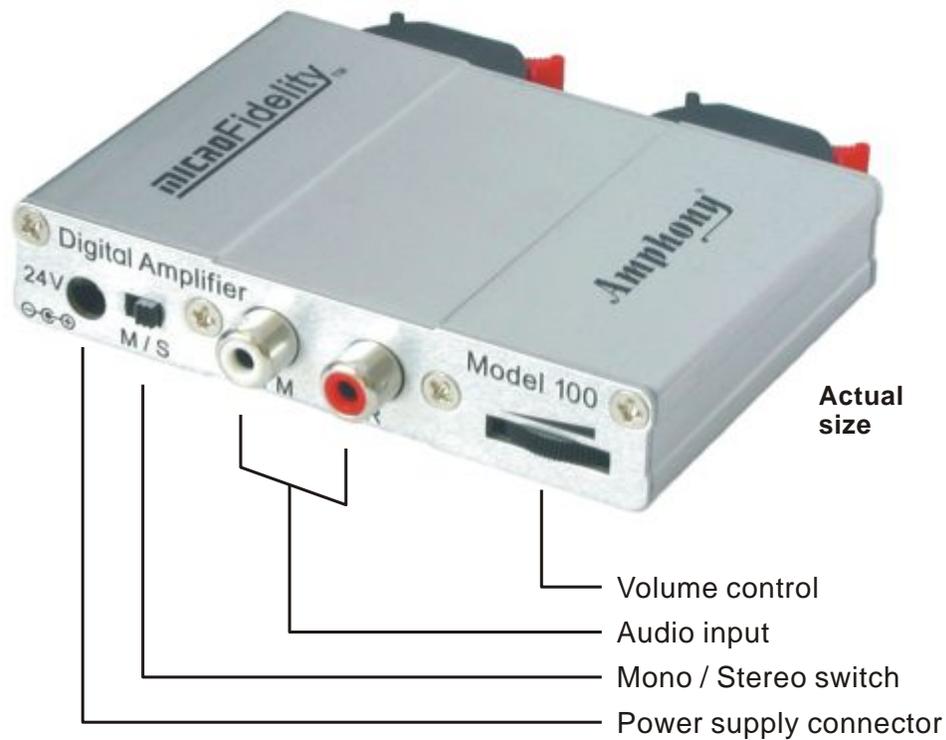

Monoblock application



**Mono / Stereo
Switchable**

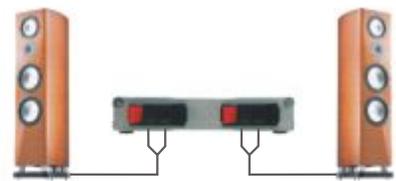

Stereo amplifier application

Specifications

| | |
|----------------------------|--|
| Output power | Mono: 1 x 150 W (peak), 1 x 80 W (rms) Stereo: 2 x 40 W (rms) |
| Signal to Noise | Mono: 1 x 115 dBA, Stereo: 112 dBA |
| Frequency response | 1 Hz - 70 kHz @ 8 Ohms |
| Harmonic distortion | Mono: 0.04% @ 50 W, 1 kHz Stereo: 0.04% @ 25 W, 1 kHz |
| Power efficiency | 93 % |
| Idle power | < 2 W |
| Dimensions | 3-9/16 " (W) x 3-7/16 " (D) x 3/4 " (H) 91 mm (W) x 86 mm (D) x 19 mm (H) |



Also available
in black